


@Anywhere API

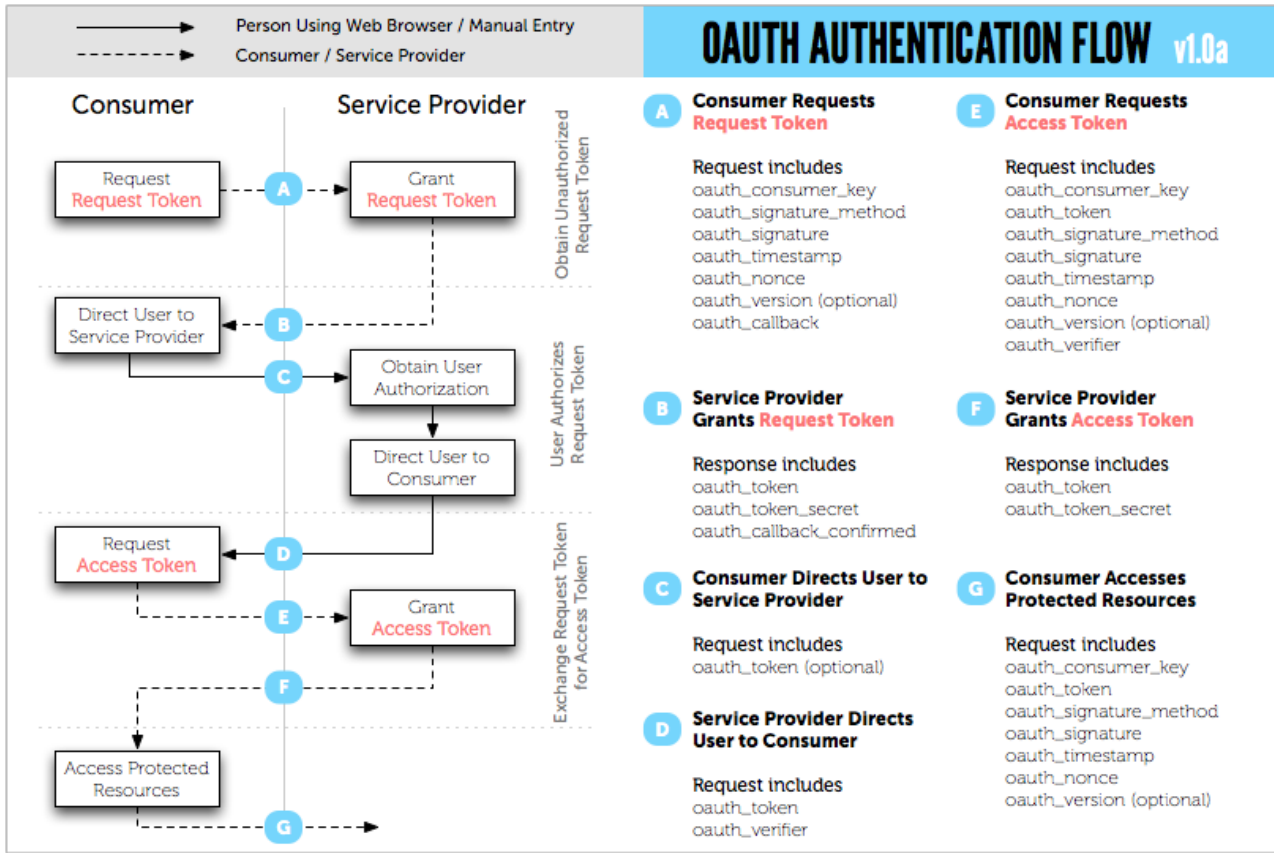

OAuth API . OAuth (API
 ID , Gmail OAuth API , 3 가 OAuth
 OAuth API
 @Anywhere OAuth
 POST . @Anywhere OAuth 2.0 API <iframe> 가
 OAuth @Anywhere API
 가 가 @Anywhere (?)
 REST API 'is' 가
 jQuery

Anywhere methods

twtr.anywhere : arg1 = version or callback(client), arg2 = callback(client)
twtr.anywhere.config : arg1 = options
twtr.anywhere.signOut :

Client methods

client.signIn :
client.isConnected :
client.requireConnect :
client.hovercards :
client.linkifyUsers :
client.tweetBox :
client.connectButton :
client.followButton :
client.one : EventProvider
client.trigger : EventProvider
client.bind : EventProvider
client.unbind : EventProvider

REST API methods

client.Base : Base API
client.CurrentUser : CurrentUser API block
follow
notifications
report
statics
unblock
unfollow
client.DirectMessage : DirectMessage API send: DirectMessage
client.List : List API
client.Place : Place API find: Place
nearby: Collection
client.SavedSearch : SavedSearch API
client.SearchResult : SearchResult API
client.Status : Status API favorite : Status
find : Status
publicTimeline : Collection
reply : Status
retweet : Status
search : Collection

unfavorite : Status
update : Status
client.User : User API current : CurrentUser
find : User
findAll : Collection
search : Collection

User methods

user.data : arg1 = attribute, arg2 = value
user.block : arg1 = options
user.follow : arg1 = options
user.unblock : arg1 = options
user.unfollow : arg1 = options
user.update : arg1 = string, arg2 = params
user.directMessage, user.dm : DM arg1 = string, arg2 = callback(object)
user.notifications : arg1 = mode, arg2 = options
user.report : arg1 = callback(options)
user.lists : arg1 = callback(array)
user.subscriptions : arg1 = options
user.memberships : arg1 = callback(array)
user.timeline : arg1 = callback(array)
user.favorites : arg1 = callback(array)
user.followers : arg1 = callback(array)
user.friends : arg1 = callback(array)
user.isBlocking : arg1 = screenName, arg2 = callback(boolean)
user.isFollowedBy : arg1 = screenName, arg2 = callback(boolean)
user.isFollowing : arg1 = screenName, arg2 = callback(boolean)
user.isFriend : arg1 = screenName, arg2 = callback(boolean)
user.isMutual : arg1 = screenName, arg2 = callback(boolean)

Examples

```

<script src="http://platform.twitter.com/anywhere.js?id=YOUR_API_KEY&v=1"> </script>
<script type="text/javascript">
  twttr.anywhere(function(client) {
    var currentUser, screenName, profileImage, profileImageTag;
    if (client.isConnected()) {
      currentUser = client.currentUser;
      screenName = currentUser.data('screen_name');
      profileImage = currentUser.data('profile_image_url');
      profileImageTag = "<img src=\"" + profileImage + "\"/>";
      $('#connect - placeholder').append("Logged in as " + profileImageTag + " " + screenName);
    } else {
      client("#connect - placeholder").connectButton();
    }
  });
</script>

```

```

var footer = $('#hovercard - footer');
client.User.find(screenName).dm('
      !').unfollow({
  success: function() {
    footer.addClass("following");
  },
  error: function(result) {
    if (result.status == 403 && result.response.error.match(/already requested to follow/))
      footer.addClass("follow - pending");
    else if (result.status != 401)
      footer.addClass("follow - alert");
  }
}).block({
  success: function() {
    footer.addClass("blocking")
      .removeClass("sms - setting - not - off")
      .addClass("sms - setting - off")
  },
  error: function() {
    footer.removeClass("not - following").addClass("following");
  }
});

```

가

- * Anywhere
- * 가
- * @Anywhere
- * @Anywhere OAuth
- * @Anywhere OAuth 가
- * @Anywhere OAuth 가
- * @Anywhere OAuth 가
- * Anywhere onSignIn, onSignOut, onInitialize 가